

## ENSITU® 7000 O<sub>2</sub> transmitter probe


For small sized boiler and furnace applications





## ENSitu® 7000 – PRODUCT INNOVATION

### Install, power up and measure

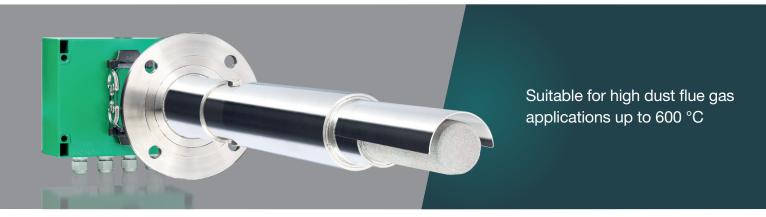

Decades of experience in design and construction of highest quality analyzers have resulted in the <code>ENSITU®</code> 7000, a budget friendly  ${\rm O_2}$  transmitter probe, made by <code>ENOTEC</code>.

Being able to withstand high flue gas temperatures up to 600°C and high dust loads, the *ENSITU*® 7000 allows a fast and continuous measurement.

Highly versatile and robust, the new *ENOTEC* analyzer is the ideal solution for process control in small to medium sized boilers, using all applicable fuels such as gas, oil and coal. The *ENSITU*® 7000 works out of the box, needing no calibration or instrument air supply.

*ENSITU*<sup>®</sup> 7000 measures InSitu: diffusion takes place through the large filter with v-shield. Flue gas extraction and conditioning is not necessary.

Installation takes a matter of minutes: Install using an industry standard flange, power up and measure. Available in 3 lengths, the *ENSITU*® 7000 is designed for easy integration in existing boiler concepts.

#### Technical specification

Measuring principle	Zirconium dioxide, InSitu	Probe material	1.4571 (316Ti)
Probe insertion depth	313 mm, 536 mm, 996 mm	Flange connection	corresponds to DN65 PN6
Reaction time	approx. 0,5 seconds	Power supply voltage	48 VDC, 5A max.
Accuracy	± 0,2 % O <sub>2</sub>	Ambient temperature	-40 °C +70 °C
Process gas pressure	950 - 1050 mbar	IP code	IP 66 / NEMA 4X
Process gas temperature	max. 600 °C	Interfaces	4 - 20 mA, ENOTEC Remote









# Plug and play operation with smart analyzer control

Using your smartphone or tablet, *ENSITU*® 7000 can be completely controlled and configured. The *ENOTEC* Remote app is available for free.

Additionally, your process or analyzer data can be viewed in real-time, including a comprehensive data storage with process and analyzer history.

At any time, all saved data can be sent conveniently from your device for archiving or to *ENOTEC* for support.

The electronics are detachable for easier access if necessary and can be wall or cabinet mounted.

 $\it ENSITU^{\circ}$  7000 offers the longest lifespan using  $\it ENOTEC$ 's superior quality  $\it O_2$  sensors and carries a worldwide 2 year warranty.



## Intuitive operation using ENOTEC Remote

Free ENOTEC app for remote diagnostics.

Configuration and operation via *ENOTEC* Remote app using your smartphone or tablet.

Send process and analyzer data directly from the app for archiving or support purposes.







### EN 51tu® 7000 – PRODUCT INNOVATION

### Company

*ENOTEC* provides gas sensing solutions since 1980, manufacturing products with a high degree of accuracy, quality and durability, made completely in Germany. Our flexibility allows us to quickly develop solutions individually designed to meet your problems. On request, we also offer after delivery service concepts – the world over.

*ENOTEC* international sales and service network: *ENOTEC* USA, *ENOTEC* ASIA, *ENOTEC* UK, *ENOTEC* EAST EUROPE and over 50 well-trained and reliable partners worldwide.



### More products

OXITEC® O, Analyzers



Fast, precise and robust InSitu O<sub>2</sub> measurement

**COMTEC®** O<sub>2</sub> / CO<sub>2</sub> Analyzers



Combustion optimization with InSitu O<sub>2</sub> / CO<sub>e</sub> analysis

AQUATEC® O, / H,O Analyzers



Optimize drying processes with reliable O<sub>2</sub> / H<sub>2</sub>O measurement **CEMTEC®** Gas sampling system



Continuous process control in high temperature and high dust processes



Watch the *ENOTEC* product videos on our YOUTUBE channel. www.youtube.com/ENOTECsensors



enotec-sensors

**ENOTEC GmbH** 

Industriestrasse 7, 51709 Marienheide – Germany, phone: +49 (0) 22 64 45 78 0 info@enotec.com, www.enotec.com



Representantes / Distribuidores Exclusivos

Tel: (+54 11) 5352 2500
Email: info@dastecsrl.com.ar
Web: www.dastecsrl.com.ar