

Overview



MultiRanger is a versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries.

Benefits

- Digital input for back-up level override from point level device
- Communication using built-in Modbus RTU via RS 485
- Compatible with SmartLinx communication options or SIMATIC PDM via RS 485
- Single or dual point level monitoring
- Auto False-Echo Suppression for fixed obstruction avoidance
- Differential amplifier transceiver for common mode noise reduction and improved signal-to-noise ratio
- MultiRanger 100: level measurements, simple pump control, and level alarm functions
- MultiRanger 200: level, volume, and flow measurements in open channels, differential control, extended pump control, and alarm functions
- Wall and panel mounting options

Application

MultiRanger can be used on different materials, including fuel oil, municipal waste, acids, woodchips, or on materials with high angles of repose. MultiRanger offers true dual point monitoring, digital communications with built-in Modbus RTU via RS 485, as well as compatibility with SIMATIC PDM, allowing PC configuration and setup. MultiRanger features Sonic Intelligence advanced echo-processing software for increased reading reliability.

MultiRanger 100 offers cost-effective level alarming, as well as on/off and alternating pump control. MultiRanger 200 will monitor open channel flow and features more advanced relay alarming and pump control functions as well as volume conversion.

It is compatible with chemical-resistant EchoMax transducers that can be used in hostile environments at temperatures as high as 145 °C (293 °F).

- Key Applications: wet wells, flumes/weirs, bar screen control, hoppers, chemical storage, liquid storage, crusher bins, dry solids storage

Design

The MultiRanger is available in wall or panel mounting options.

Level Measurement

Continuous level measurement

Controllers / MultiRanger 100/200

Selection and ordering data

MultiRanger 200 Ultrasonic level controller Continuous, non-contact, 15 m (50 ft) range. Monitors level, volume, and open channel flow in liquids, slurries, and solids.		Article No. 7ML5033- ● ● ● ● ● - ● ●								
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.										
Versions										
MultiRanger 100, level measurement only		1								
MultiRanger 200, level, volume, flow, and differential measurements		2								
Mounting, enclosure design										
Wall mount, standard enclosure		A								
Wall mount, 4 entries, 4 M20 cable glands included		B								
Panel mount (CE, UKCA, cCSA _{US} , FM, UL)		C								
Power supply										
100 ... 230 V AC		A								
12 ... 30 V DC		B								
Number of measurement points										
Single point version				0						
Dual point version				1						
Communication (SmartLinx)										
Without module						0				
SmartLinx PROFIBUS DP module						2				
SmartLinx DeviceNet module						3				
See SmartLinx product on page for more information.										
Output relays										
3 relays (2 Form A, 1 Form C), 250 V AC								1		
6 relays (4 Form A, 2 Form C), 250 V AC								2		
1 relay (1 Form A), 250 V AC (available on MultiRanger 100 model only)								3		
Approvals										
Ordinary Locations/General Purpose (Non-Ex), CE, UKCA, FM, cCSA _{US} , UL Listed, RCM, EAC, KC										A
CSA Class I, Div. 2, Groups A, B, C, and D; Class II, Div. 2, Groups F and G; Class III ¹⁾										B
ATEX II 3D Ex tD A22 IP65 T75 °C, ATEX II 3D Ex tD A22 IP54 T75 °C; UKEX II 3D Ex tD A22 IP65 T75 °C, UKEX II 3D Ex tD A22 IP54 T75 °C; EAC Ex Ex tc IIIC T75 °C Dc X ²⁾										C

¹⁾ For wall mount applications only.

²⁾ For standard enclosure wall mount, option A only.

Selection and Ordering data	Order code
Further designs	
Please add "-Z" to Article No. and specify Order code(s).	
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification(max. 27 characters) specify in plain text	Y15

Spare parts and accessories	Article No.
Operating Instructions	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
Accessories	
Handheld programmer	A5E36563512
Tag, stainless steel, 12 x 45 mm (0.47 x 1.77 inch), one text line, suitable for enclosure	7ML1930-1AC
M20 cable gland kit (4 M20 cable glands, 4 M20 nuts, 4 washers)	7ML1930-1FV
Sunshield kit, 304 stainless steel	7ML1930-1GA
SITRANS RD100, loop powered display - see Chapter 7	7ML5741-...
SITRANS RD150, remote digital display for 4 ... 20 mA and HART devices - see Chapter 7	7ML5742-.....-....

Selection and ordering data (continued)

Spare parts and accessories	Article No.
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	7ML5740-...
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	7ML5744-...
Spare parts	
Power Supply Board (100 ... 230 V AC)	7ML1830-1MD
Power Supply Board (12 ... 30 V DC)	7ML1830-1ME
MultiRanger 100/200/ HydroRanger 200 display, non-HMI	7ML1830-1MF
Removable terminal blocks	A5E38824197

Technical specifications

MultiRanger 100/200	
Mode of Operation	
Measuring principle	Ultrasonic level measurement
Measuring range	0.3 ... 15 m (1 ... 50 ft)
Measuring points	1 or 2
Input	
Analog (MultiRanger 200 only)	0 ... 20 mA or 4 ... 20 mA, from alternate device, scalable
Discrete	10 ... 50 V DC switching level Logical 0 ≤ 0.5 V DC Logical 1 = 10 ... 50 V DC Max. 3 mA
Output	
EchoMax transducer	44 kHz
Ultrasonic transducer	Compatible transducers: ST-H and EchoMax series XPS-10, XPS 15/15F, and XRS-5
Relays	Rating 5 A at 250 V AC, non-inductive
• Version with 1 relay (MultiRanger 100 only)	1 SPST Form A
• Version with 3 relays	2 SPST Form A/1 SPDT Form C
• Version with 6 relays	4 SPST Form A/2 SPDT Form C
mA output	0 ... 20 mA or 4 ... 20 mA
• Max. load	750 Ω, isolated
• Resolution	0.1 % of range
Accuracy	
Error in measurement	0.25 % of range or 6 mm (0.24 inch), whichever is greater
Resolution	0.1 % of measuring range ¹⁾ or 2 mm (0.08 inch), whichever is greater
Temperature compensation	<ul style="list-style-type: none"> -50 ... +150 °C (-58 ... +302 °F) • Integral temperature sensor • External TS-3 temperature sensor (optional) • Programmable fixed temperature values
Rated operating conditions	
Installation conditions	
• Location	Indoor/outdoor
• Installation category	II
• Pollution degree	4
Ambient conditions	
• Ambient temperature (housing)	-20 ... +50 °C (-4 ... +122 °F)
• Storage temperature	-20 ... +50 °C (-4 ... +122 °F)
Design	
Weight	
• Wall mount	1.37 kg (3.02 lb)
• Panel mount	1.50 kg (3.31 lb)
Material (enclosure)	Polycarbonate
Degree of protection (enclosure)	

Technical specifications (continued)

MultiRanger 100/200	
• Wall mount	IP65/Type 4X/NEMA 4X
• Panel mount	IP54/Type 3/NEMA 3
Electrical connection	
• Transducer and mA output signal	2-core copper conductor, twisted, shielded, 0.5 ... 0.75 mm ² (22 ... 18 AWG), Belden 8760 or equivalent is acceptable
• Max. separation between transducer and transceiver	365 m (1 200 ft)
Displays and controls	100 x 40 mm (4 x 1.5 inch) multi-block LCD with backlighting
Programming	Programming using hand-held programmer, SIMATIC PDM or via PC with Dolphin Plus software
Power supply	
AC version	100 ... 230 V AC ± 15 %, 50/60 Hz, 36 VA (17 W)
DC version	12 ... 30 V DC (20 W)
Certificates and approvals	<ul style="list-style-type: none"> • CE, UKCA, RCM, EAC, KC²⁾ • Lloyd's Register of Shipping • ABS Type Approval • FM, cCSAus, UL listed • CSA Class I, Div. 2, Groups A, B, C, D, Class II, Div. 2, Groups F, G, Class III (wall mount only), ATEX II 3D, UKEX II 3D, EAC Ex
Communication	<ul style="list-style-type: none"> • RS 232 with Modbus RTU or ASCII via RJ-11 connector • RS 485 with Modbus RTU or ASCII via terminal strips • Optional: SmartLinx cards for <ul style="list-style-type: none"> - PROFIBUS DP - DeviceNet

¹⁾ Program range is defined as the empty distance to the face of the transducer plus any range extension


²⁾ EMC performance available on request

Level Measurement

Continuous level measurement


Controllers / MultiRanger 100/200

Dimensional drawings

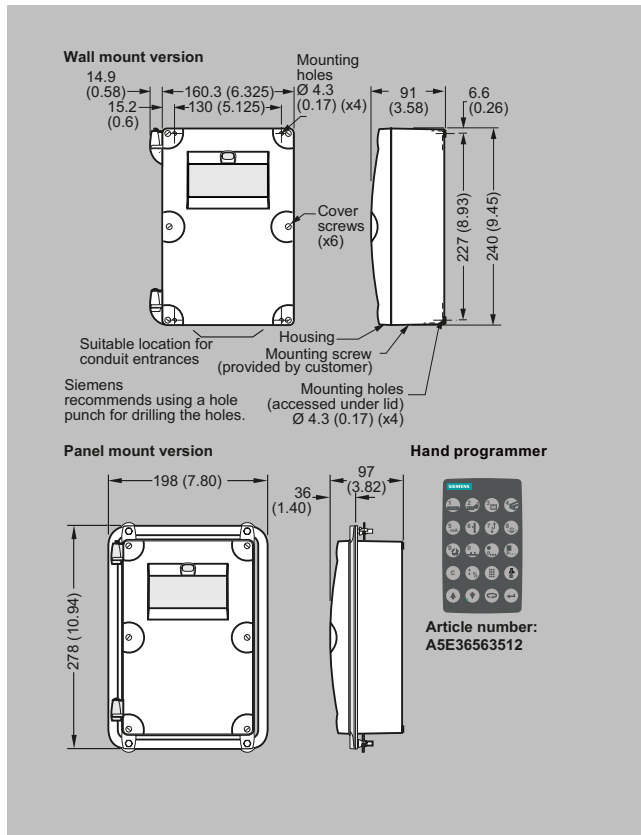

MultiRanger 100/200, dimensions in mm (inch)

Circuit diagrams

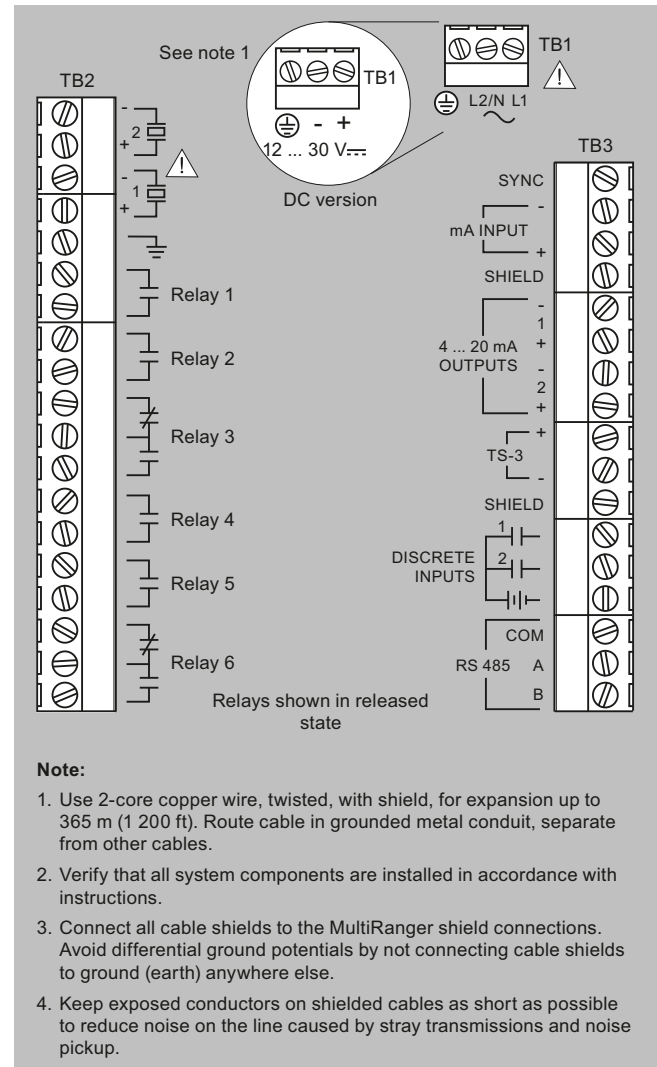

MultiRanger 100/200 connections



Siemens Solution Partner - Automation

Argentina

Tel: (+54 11) 5352 2500

Email: info@dastecsrl.com.ar

Web: www.dastecsrl.com.ar